

FEATURES

- Maximum Offset Voltage 1mV
- Maximum Bias Current 15nA
- Typical Output Drive 70mA
- Operates from 1.1V to 40V
- Internal Pull-Up Current
- Output Can Drive Loads Above V^+
- 30 μ A Supply Current (LT1017)
- 110 μ A Supply Current (LT1018)

APPLICATIONS

- Power Supply Monitors
- Relay Driving
- Oscillators


DESCRIPTION

The LT1017 and LT1018 are general purpose micropower comparators. The LT1017 is optimized for lowest operating power while the LT1018 operates at higher power and higher speed. Both devices can operate from a single 1.1V cell up to 40V. The output stage includes a class "B" pull-up current source, eliminating the need for an external resistive pull-up and saving power. The output stage is also designed to allow driving loads connected to a supply more positive than the device, as can comparators with open collector output stages.


Input specifications are also excellent. On-chip trimming minimizes offset voltage, while high gain and common-mode rejection ratio keep other input-referred errors low. Common-mode voltage range includes ground. Special circuitry prevents false output states even if the input is overdriven.

The LT1017 and LT1018 are pin compatible with older dual comparators such as 393 type devices.

1.5V Powered Refrigerator Alarm

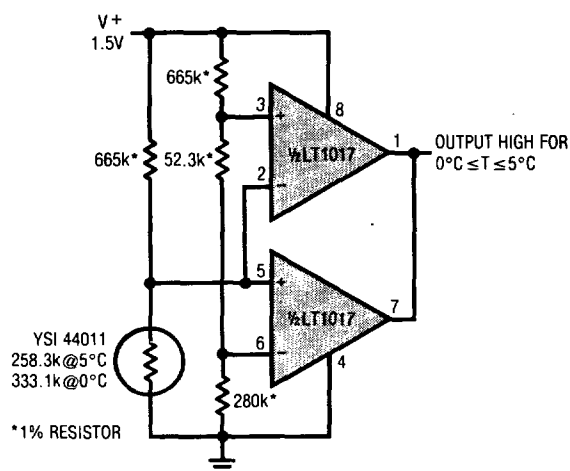

Supply Current




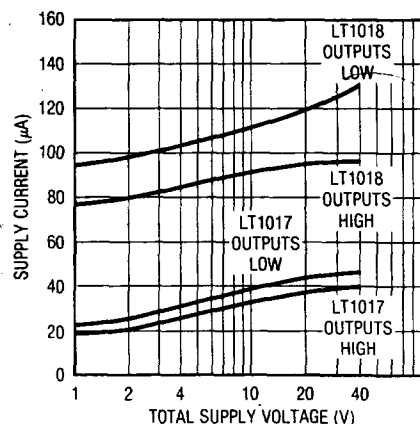


ABSOLUTE MAXIMUM RATINGS

Supply Voltage 40V
 Differential Input Voltage 40V
 Input Voltage -0.3V to 40V
 Short Circuit Duration Indefinite
 Storage Temperature Range -65°C to 150°C

Operating Temperature Range
 LT1017M, LT1018M -55°C to 125°C
 LT1017C, LT1018C 0°C to 70°C
 LT1017I, LT1018I -40°C to 85°C
 Lead Temperature (Soldering, 10 sec) 300°C

PACKAGE/ORDER INFORMATION
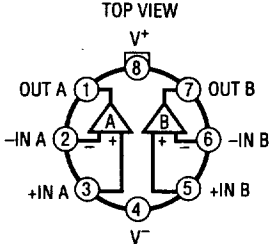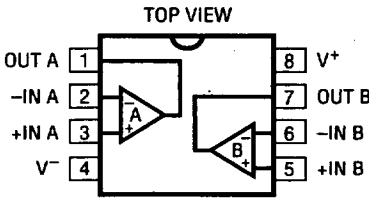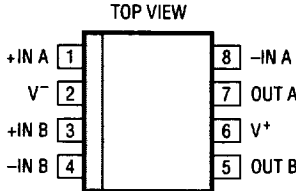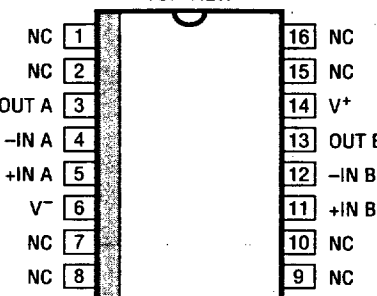
| | | | |
|--|---|---|--|
|  <p>H PACKAGE 8-LEAD TO-5 METAL CAN</p> <p>$T_{JMAX} = 150^{\circ}C, \theta_{JA} = 150^{\circ}C/W, \theta_{JC} = 45^{\circ}C/W$</p> | <p>ORDER PART NUMBER</p> <p>LT1017MH LT1017CH LT1018MH LT1018CH</p> |  <p>N8 PACKAGE 8-LEAD PLASTIC DIP</p> <p>$T_{JMAX} = 100^{\circ}C, \theta_{JA} = 130^{\circ}C/W$</p> | <p>ORDER PART NUMBER</p> <p>LT1017CN8 LT1018CN8</p> |
|  <p>S8 PACKAGE 8-LEAD PLASTIC SO (0.150" BODY WIDTH)</p> <p>NOTE: PINOUT ON S8 PACKAGE DOES NOT MATCH 8 PIN DIP PINOUT.</p> <p>$T_{JMAX} = 100^{\circ}C, \theta_{JA} = 190^{\circ}C/W$</p> | <p>ORDER PART NUMBER</p> <p>LT1017CS8 LT1017IS8 LT1018CS8</p> |  <p>S PACKAGE 16-LEAD PLASTIC SOL</p> <p>$T_{JMAX} = 100^{\circ}C, \theta_{JA} = 130^{\circ}C/W$</p> | <p>ORDER PART NUMBER</p> <p>LT1017CS8 LT1017CS LT1018CS LT1017IS LT1017IS8</p> <p>PART MARKING</p> <p>1017CS 1018CS 1017IS</p> |

10

ELECTRICAL CHARACTERISTICS

| PARAMETER | CONDITIONS | LT1017 | | | LT1018 | | | UNITS |
|----------------------------|-----------------------------------|--------|-----|-----|--------|-----|-----|-------|
| | | MIN | TYP | MAX | MIN | TYP | MAX | |
| Offset Voltage (Note 1) | $\pm 0.75V \leq V_S \leq \pm 20V$ | 25°C | 0.4 | 1 | 0.4 | 1 | mV | |
| | | ● | 0.5 | 1.4 | 0.5 | 1.4 | mV | |
| | | 125°C | | 1.5 | 0.7 | 1.5 | mV | |
| Bias Current | $\pm 0.75V \leq V_S \leq \pm 20V$ | 25°C | 5 | 15 | 15 | 75 | nA | |
| | | ● | 7 | 25 | 18 | 100 | nA | |
| | | 125°C | 10 | 40 | | 110 | nA | |
| Offset Current | $\pm 0.75V \leq V_S \leq \pm 20V$ | 25°C | 0.4 | 2 | 1 | 8 | nA | |
| | | ● | 0.5 | 3 | 1.6 | 12 | nA | |
| | | 125°C | | 12 | | 20 | nA | |

ELECTRICAL CHARACTERISTICS

| PARAMETER | CONDITIONS | | LT1017 | | | LT1018 | | | UNITS |
|------------------------------|--|-------|--------|-----|------|--------|-----|-----|-------|
| | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| Common-Mode Rejection Ratio | $V_S = \pm 20V, -20V \leq V_{CM} \leq 19.1V$ | 25°C | 105 | 115 | | 105 | 115 | dB | |
| | | ● | 100 | 115 | | 100 | 115 | dB | |
| | | 125°C | 86 | 100 | | 95 | 110 | dB | |
| Power Supply Rejection Ratio | $\pm 0.75V \leq V_S \leq \pm 20V$ | 25°C | 96 | 110 | | 96 | 110 | dB | |
| | | ● | 95 | 105 | | 95 | 105 | dB | |
| | | 125°C | 86 | | | 86 | 100 | dB | |
| Gain | No Load, $V_{OUT} = \pm 19.9V$ (Note 2) | 25°C | 110 | 115 | | 110 | 125 | dB | |
| | | ● | 105 | 115 | | 105 | 120 | dB | |
| | | 125°C | 100 | | | 100 | | dB | |
| | | 25°C | 100 | 110 | | 100 | 110 | dB | |
| | | ● | 94 | | | 94 | | dB | |
| Output Sink Current | $V^+ = 4.5V, V^- = 0$ Overdrive > 30mV | 25°C | 30 | 65 | | 35 | 70 | mA | |
| | | ● | 25 | 50 | | 25 | 50 | mA | |
| | | 125°C | 10 | 20 | | 10 | 30 | mA | |
| Output Source Current | $V^+ = 40V, V^- = 0$ $V_{IN} = 5mV, V_{OUT} = 0.4V$ | 25°C | 30 | 75 | | 75 | 250 | μA | |
| | | ● | 25 | 70 | | 50 | 220 | μA | |
| | | 125°C | 25 | 75 | | 50 | 200 | μA | |
| Output Source Current | $V^+ = 1.2V, V^- = 0$ $V_{IN} = 5mV, V_{OUT} = 0.4V$ | 25°C | 25 | 35 | | 70 | 140 | μA | |
| | | ● | 15 | 20 | | 45 | 120 | μA | |
| | | 125°C | 25 | 40 | | 40 | 110 | μA | |
| Negative Output Saturation | $I_{OUT} = 0$ $V^+ = 4.5V, V^- = 0$ $V_{IN} = -10mV$ | 25°C | | 5 | 20 | | 5 | 15 | mV |
| | | ● | | 35 | 60 | | 35 | 60 | mV |
| | | 25°C | | 60 | 120 | | 60 | 120 | mV |
| | | ● | | 120 | 200 | | 120 | 250 | mV |
| | | 25°C | | 350 | 600 | | 350 | 700 | mV |
| | | ● | | 5 | 20 | | 8 | 20 | mV |
| | | 25°C | | 40 | 75 | | 35 | 70 | mV |
| | | ● | | 75 | 150 | | 70 | 150 | mV |
| | | 25°C | | 150 | 300 | | 150 | 300 | mV |
| | | ● | | 600 | 900 | | 500 | 900 | mV |
| | | 125°C | | 25 | 50 | | 10 | 40 | mV |
| | | ● | | 60 | 100 | | 60 | 100 | mV |
| | | 125°C | | 100 | 200 | | 110 | 200 | mV |
| | | ● | | 300 | 600 | | 300 | 400 | mV |
| | | 125°C | | | | | 900 | | mV |
| Positive Output Saturation | $I_{OUT} = 0$ $= 10\mu A$ $= 0$ $= 10\mu A$ $= 0$ $= 10\mu A$ | 25°C | | 40 | 80 | | 35 | 80 | mV |
| | | ● | | 175 | 250 | | 175 | 250 | mV |
| | | 25°C | | 45 | 90 | | 45 | 90 | mV |
| | | ● | | 190 | 300 | | 190 | 300 | mV |
| | | 125°C | | 50 | 100 | | 50 | 100 | mV |
| | | ● | | | 300 | | | 300 | mV |
| Leakage Current | $V_S = 5V, V_{OUT} = 40V$ $V_{IN} = 100mV$ | 25°C | | 0.5 | 3 | | 1 | 8 | μA |
| | | ● | | 0.6 | 3 | | 1.8 | 10 | μA |
| | | 125°C | | | 5 | | | 15 | μA |
| Supply Current | $V_S = 5V$ | 25°C | | 30 | 60 | | 110 | 250 | μA |
| | | ● | | 40 | 80 | | 110 | 250 | μA |
| | | 125°C | | | 80 | | | 300 | μA |
| | $V_S = 40V$ | 25°C | | 40 | 90 | | 130 | 250 | μA |
| | | ● | | 55 | 100 | | 140 | 270 | μA |
| | | 125°C | | | 100 | | | 300 | μA |
| Minimum Operating Voltage | $I_{OUT} = 1mA$ | 25°C | | | 1.15 | | 1.2 | V | |
| | | ● | | | 1.15 | | 1.2 | V | |
| | | 125°C | | | 1.15 | | 1.2 | V | |


The ● denotes specifications which apply over operating temperature range of -55°C to 85°C for M grade parts and 0°C to 70°C for C grade parts.

Note 1: Offset voltage is guaranteed over a common-mode voltage range of $V^- \leq V_{IN} \leq (V^+ - 0.9V)$.


Note 2: No load gain is guaranteed but not tested (LT1017 only).

TYPICAL PERFORMANCE CHARACTERISTICS


Input Bias Current

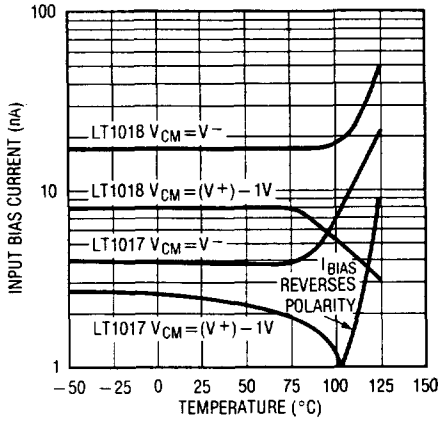


Input Offset Current

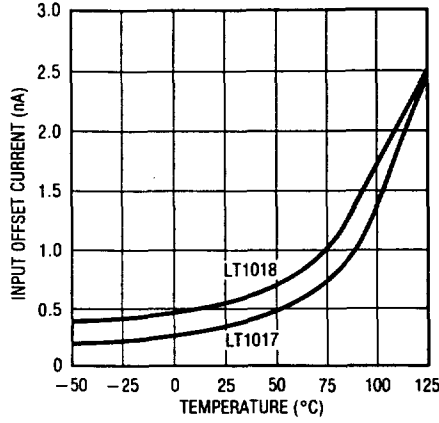


Bias Current vs Differential Input

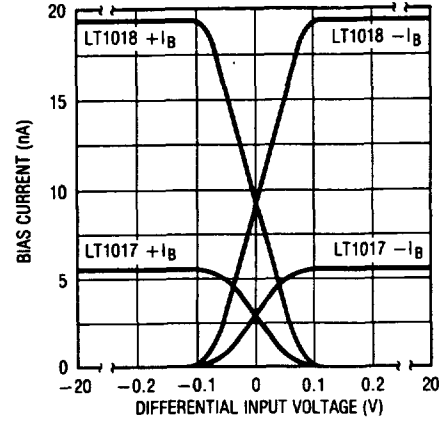


Input Bias Current with Inputs Driven Below the Supply

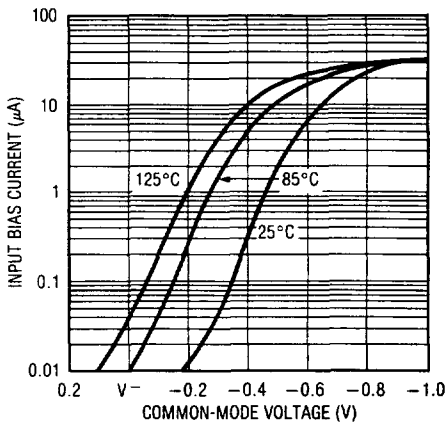


Common-Mode Limits

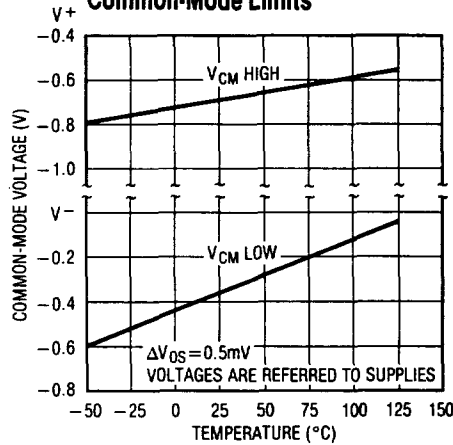


Supply Current

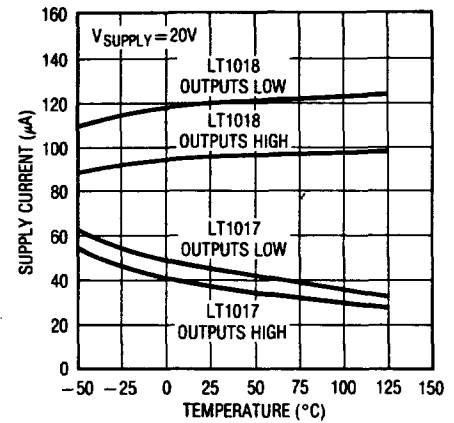


Positive Supply Current

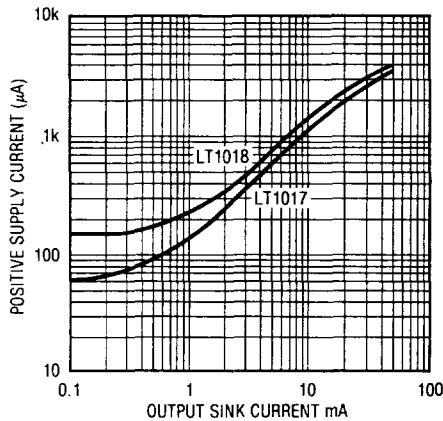

NPN Output Saturation Voltage

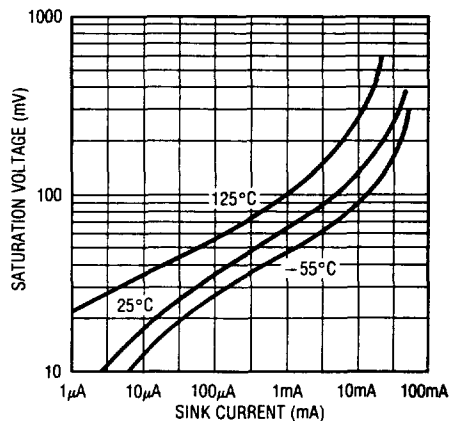


Output Sinking Current Limit

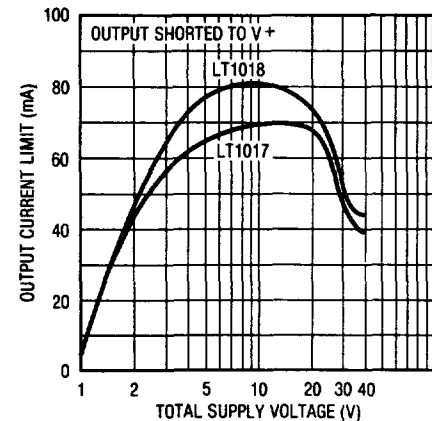


10

TYPICAL PERFORMANCE CHARACTERISTICS


Output Sinking Current Limit

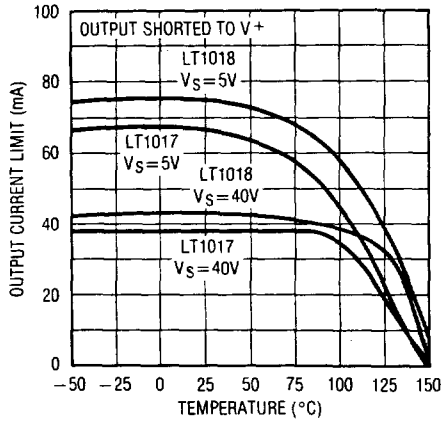


Total Switching Time

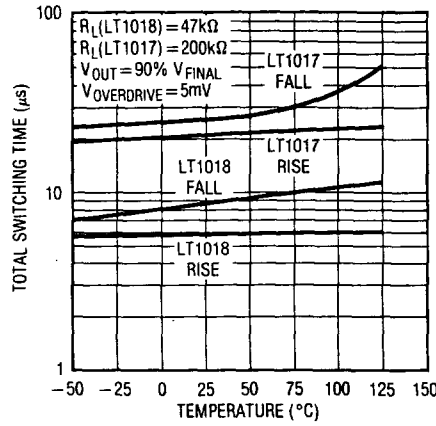


Output Delay

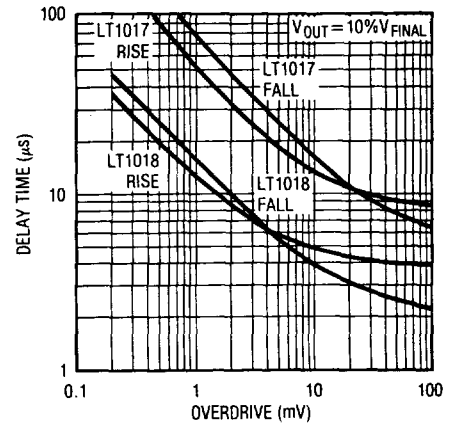


Transition Time

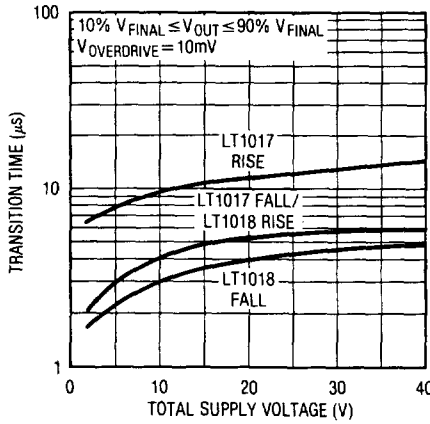

Positive Transition Time

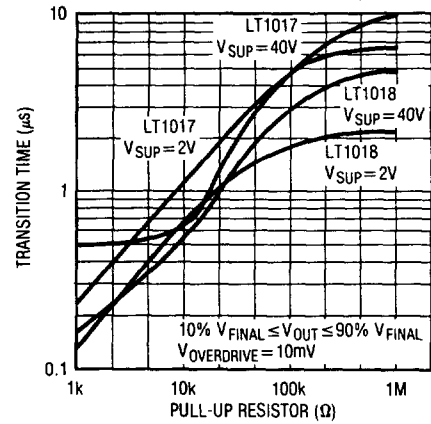


LT1017 Response Time

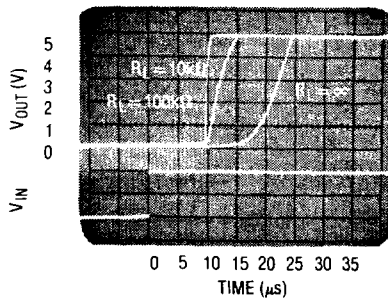


V+ = 5V; V- = 0V
V_{IN} = 100mV WITH
10mV OVERDRIVE

LT1017 Response Time

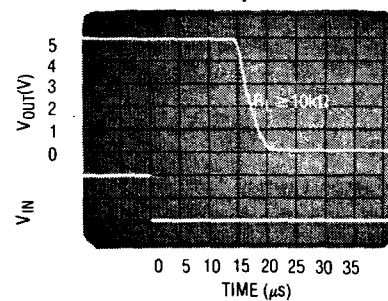


V+ = 5V; V- = 0V
V_{IN} = 100mV WITH
10mV OVERDRIVE

LT1018 Response Time

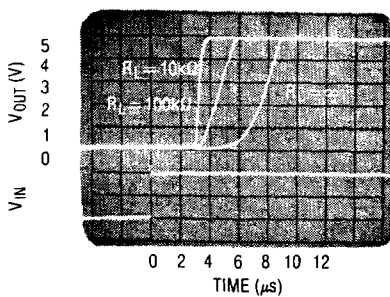

V+ = 5V; V- = 0V
V_{IN} = 100mV WITH
10mV OVERDRIVE


LT1018 Response Time

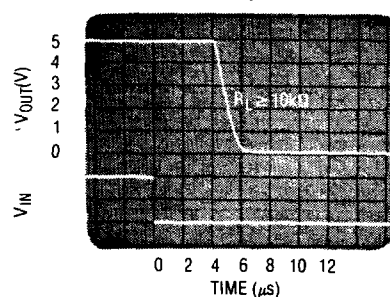

V+ = 5V; V- = 0V
V_{IN} = 100mV WITH
10mV OVERDRIVE


APPLICATIONS

LT1018 Op Amp, $A_v = 100$

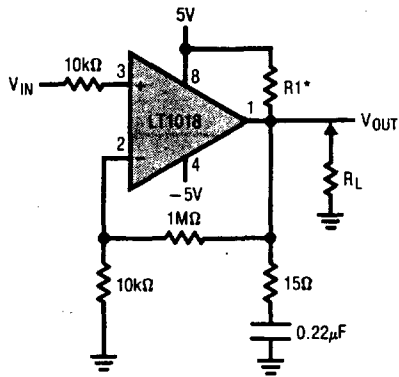


$R_L = 100k$
 BANDWIDTH = 30Hz
 - SLEW = 320V/ms
 + SLEW = 0.93V/ms
 *WITH $R_1 = 1k$
 BANDWIDTH $\approx 200Hz$

LT1017 Op Amp, $A_v = 100$

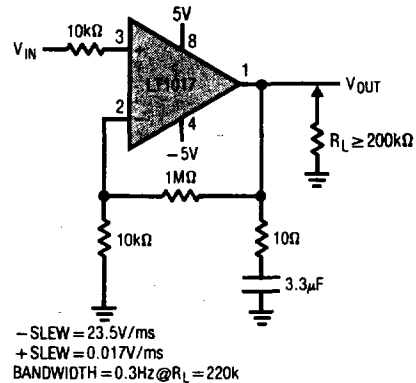


- SLEW = 23.5V/ms
 + SLEW = 0.017V/ms
 BANDWIDTH = 0.3Hz @ $R_L = 220k$


Negative Voltage Regulator

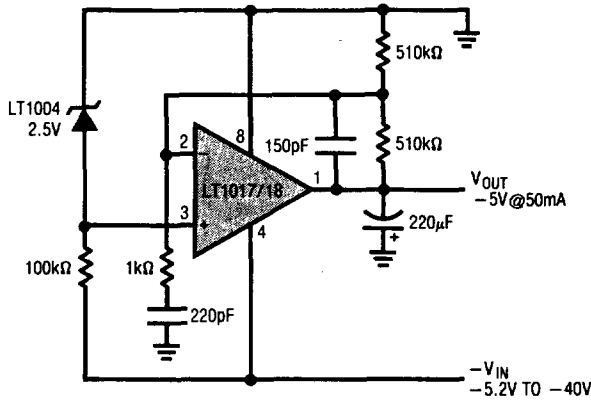


2-Wire Comparator

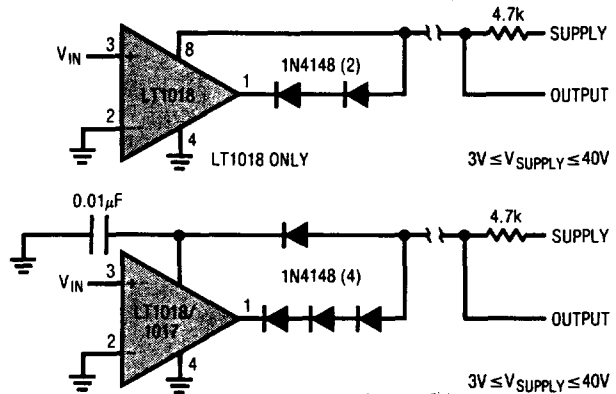

5V Power Supply Monitor

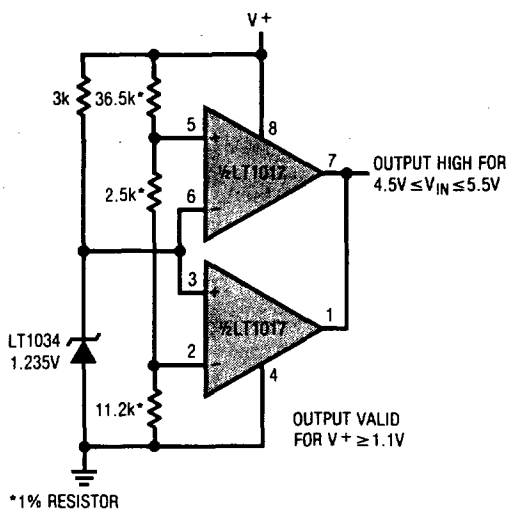


Precise Tri-Wave Generator

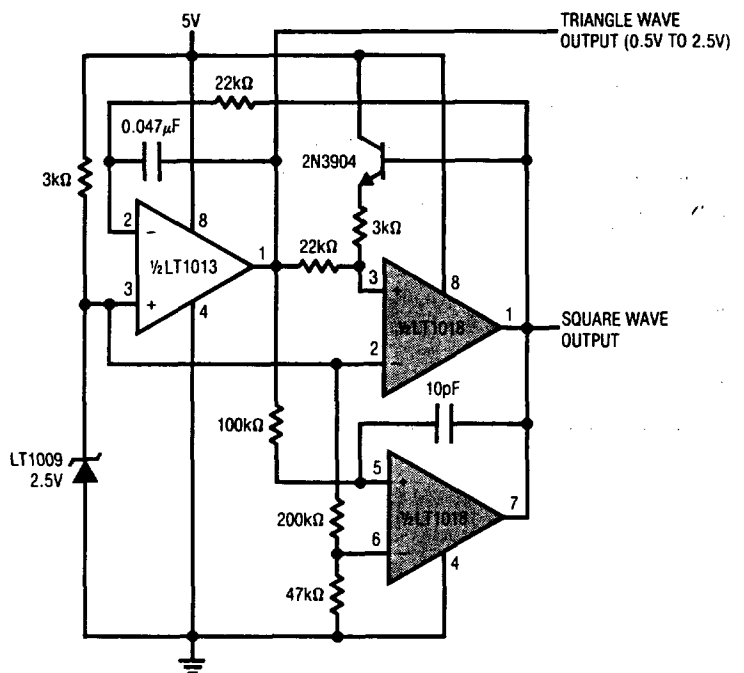


APPLICATIONS


Power Supply Monitor

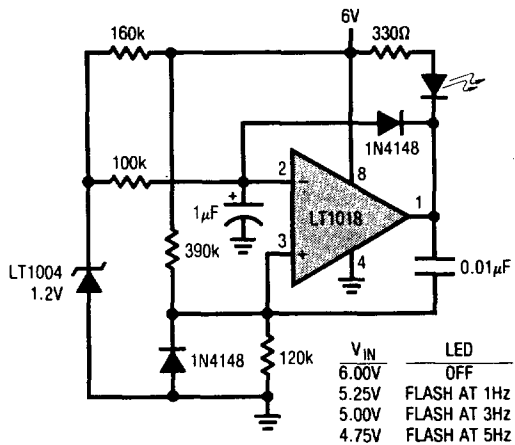


1.5V Input Flyback Regulator

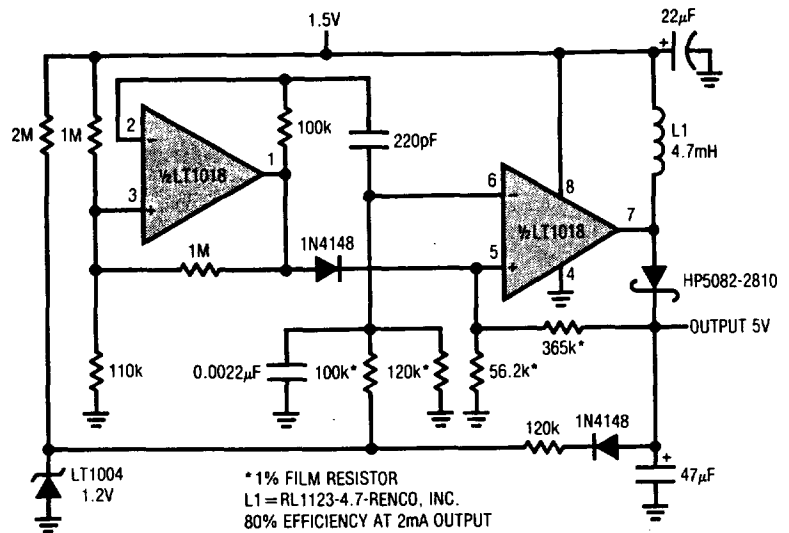

Regulated Up Converter

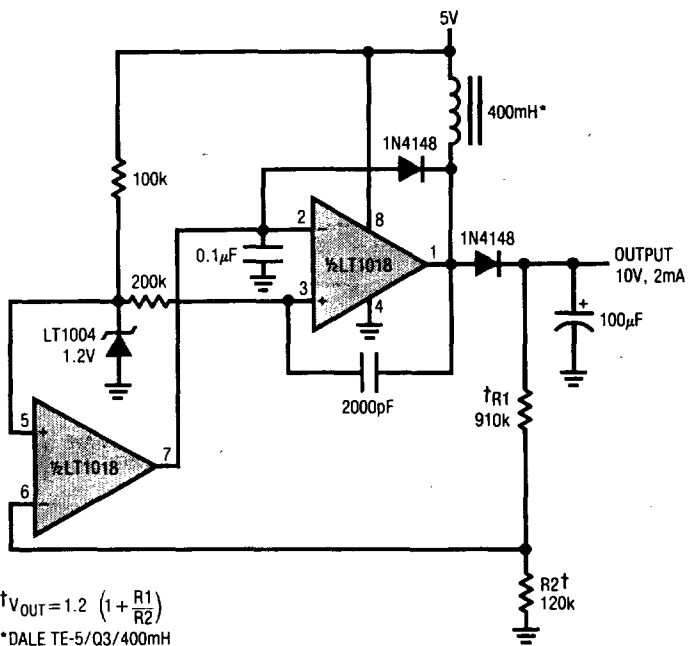


Low Power* V to F Converter

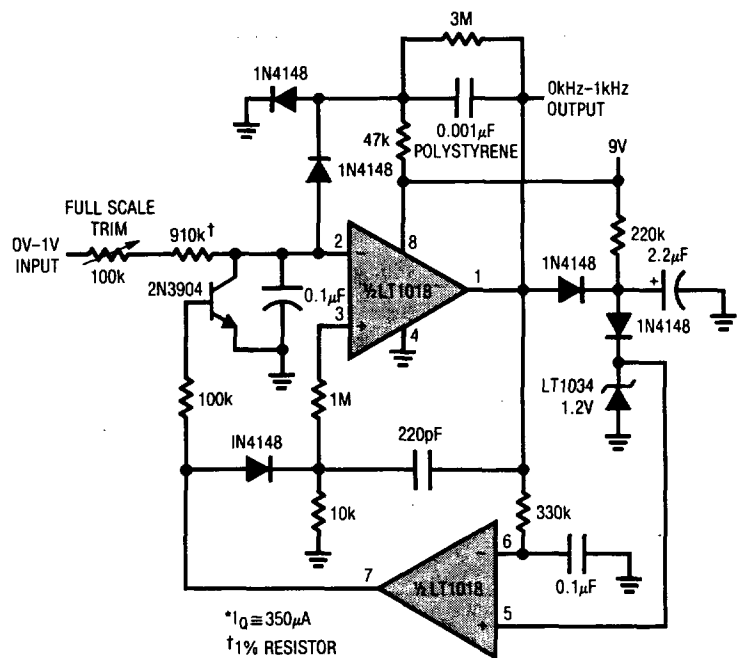


APPLICATIONS


Fully Isolated Limit Comparator

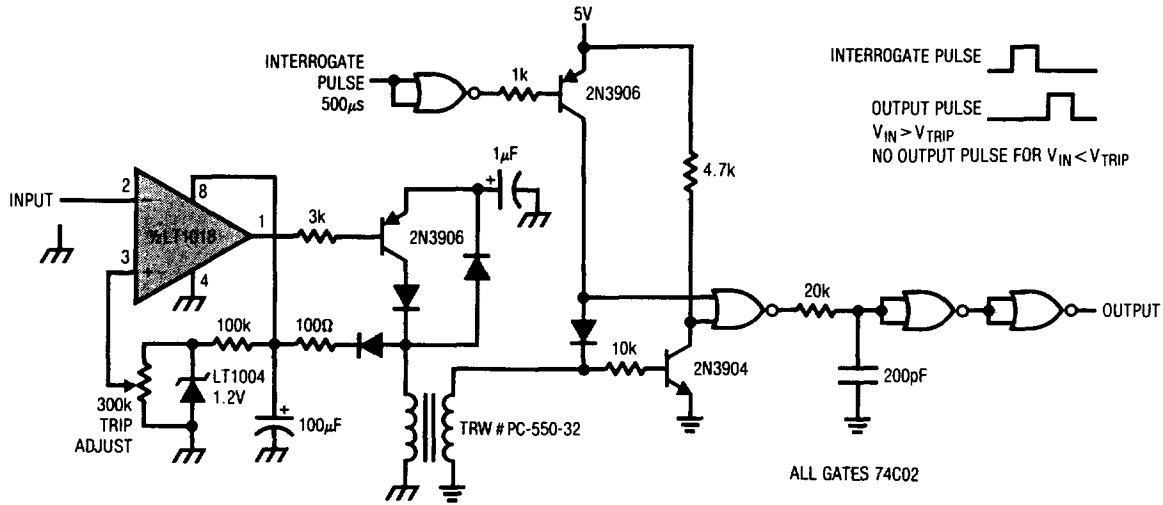

Driving Relays



Increasing Positive Output Current

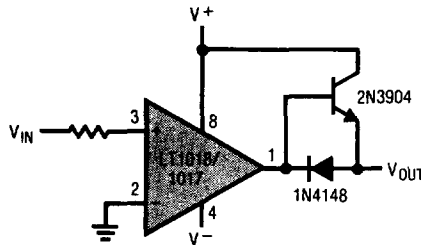

Delay On Power Up

