


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 06/21/05'	~	LJC 06/21/05'
B	ADD DIM	LL 10/30/06'	~	LJC 10/30/06'
C	增加尺寸选项	YCH 07/27/10'	~	

A&B: CUSTOMER LENGTH AVAILABLE
N: HALF OF CONTACTS

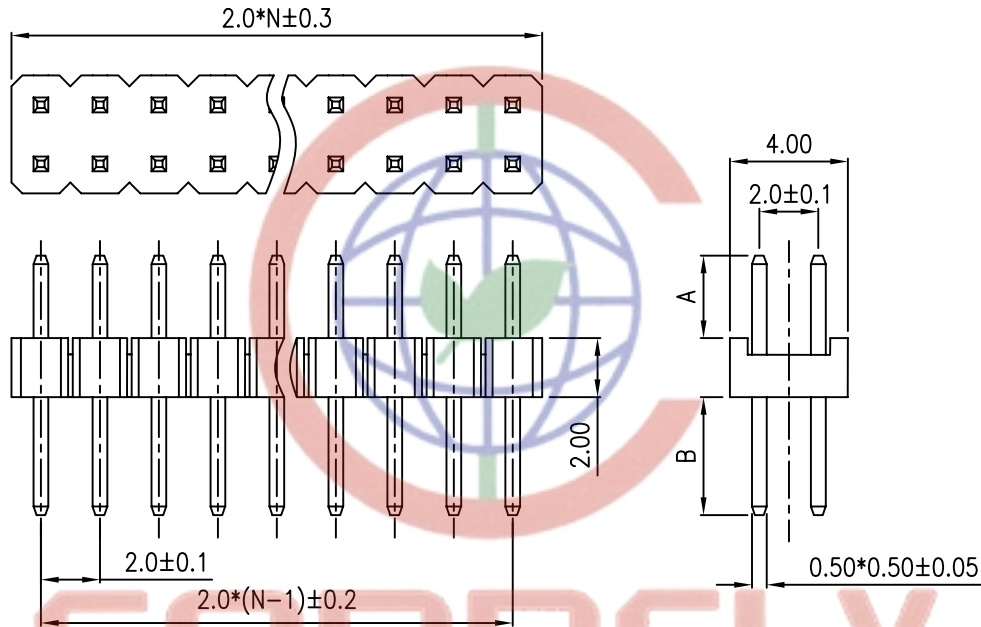


NOTES:

- MATERIAL&FINISHES
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL: COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING:1.5 Amp.
 - INSULATION RESISTANCE:1000MΩ Min.
 - DIELECTRIC WITHSTANDING:600VAC.
 - CONTACT RESISTANCE:20mΩ Max.
 - OPERATING TEMPERATURE:-40°C TO +105°C.
- PART NUMBER: DS1025-05
- PRODUCT NUMBER CODE:
DS1025-05 - X X X X X X

TABLE A & DIM.A B TYPE
1: TYPE 1
7: TYPE 7
CONTACTS TYPE
V:VERTICAL TYPE
HOUSING COLOR
B:BLACK
CONTACT PLATING
8: FULL GOLD FLASH
6: TIN
CONNECTOR TYPE
P:PLUG
No.OF CONTACTS
2*2-2*X
SERIES No.
DS1025-05

TABLE A:

TYPE	Dimension		TYPE	Dimension	
	A	B		A	B
1	2.80	4.00	10	2.80	5.50
2	3.50	5.08	11	3.00	3.70
3	10.00	2.00	12	2.20	4.60
4	2.80	10.20	13	3.00	6.00
5	4.00	8.00	14	2.40	5.00
6	2.50	4.30	15		
7	2.80	3.90	16		
8	3.00	3.50	17		
9	3.00	3.80	18		

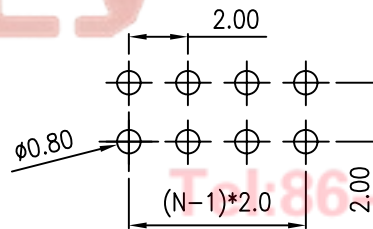

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	DUAL ROW STRAIGHT	
X.	±0.60	X.	±5'	UNITS		mm	
.X	±0.38	.X	±3'	SHEET SIZE	A4	SERIES	DS1025-05 SERIES
.XX	±0.25	.XX	±2'	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1025-05-XXXXXX-C					