
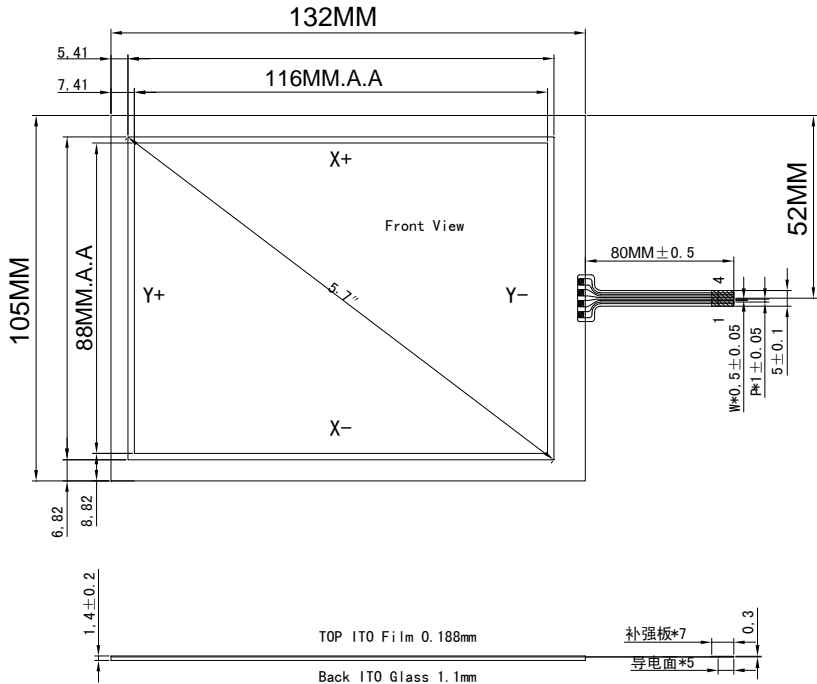


VERSION	MODIFY	DATE

PIN	Assignment
1	Y+
2	X-
3	Y-
4	X+



Notes:

1. Type: Film to Glass
2. Operating Voltage: $\leq 10V$
3. Operation Temperature: $-10^{\circ}C \sim 60^{\circ}C$
Storage Temperature: $-20^{\circ}C \sim 70^{\circ}C$
4. Life Time: $> 1,000,000$ times
5. Connect Material: FPC
6. Response Time: $\leq 10ms$
7. Linearity: $\leq 1.5\%$
8. Transmittance: $\geq 80\%$
9. Surface Hardness: $\geq 3H$ (pencil)
10. Operation force: $20g \sim 80g$
11. Resistance: X: $250 \Omega - 450 \Omega$
Y: $450 \Omega - 750 \Omega$

良辰光电有限公司
 Lctouch Electronics Co.LTD

MODEL NO.

5.7on

DRAWN:

DATE:

VERSION:

1.0

UNIT:

MM

TOLERANCE:

± 0.2

SCALE:

1:1

REV:

补强板*7

导电面*5

TOP ITO Film 0.188mm

Back ITO Glass 1.1mm