




禾瑞亞科技股份有限公司
eGalax_eMPIA Technology Inc.

4 / 5-Wire RS232 Touch Panel Controller

eGalax_eMPIA launched touch control board to meet latest Restriction of Hazardous Substances (RoHS) Directive. This touch panel controller provides the optimistic performance of your analog resistive touch panels for 4 or 5 wire models. It communicates with PC system directly through RS232 connector. You can see how superior the design is in sensitivity、accuracy and friendly operation. The touch panel driver emulates mouse left and right button function and supports operation systems as following.

OS	Version	Interfaces
Windows	Windows Vista, XP/2000, 9x/ME Windows CE 2.12/3.0/.net/5.0/6.0 Windows Embedded Windows XP Tablet PC edition Windows Vista Windows 7	RS232/USB/ PS2
Windows	Windows NT4	RS232/PS2
Linux	Mandrake (Mandrake 9.1/9.2/10, Mandriva 2005, Mandriva 2006), Red Hat (7.3/8.0/9.0), Fedora (Core I/II/III/IV/V/VI), Yellow Dog (3.X) , SuSE (9.2/9.3/10/10.1), Ubuntu (5.1/6.06), Debian (3.1, Kernel 2.4.x/2.6.x)	RS232/USB/ PS2 (up to Kernel 2.6.x)
	Android 1.5 - Google Moblin V2 - Intel	RS232/USB
DOS	DOS	RS232/PS2
Mac	Mac OS9, Mac OS X (IBM, intel CPU)	USB
QNX	QNX RTOS v6.3	RS232/USB

Controller:

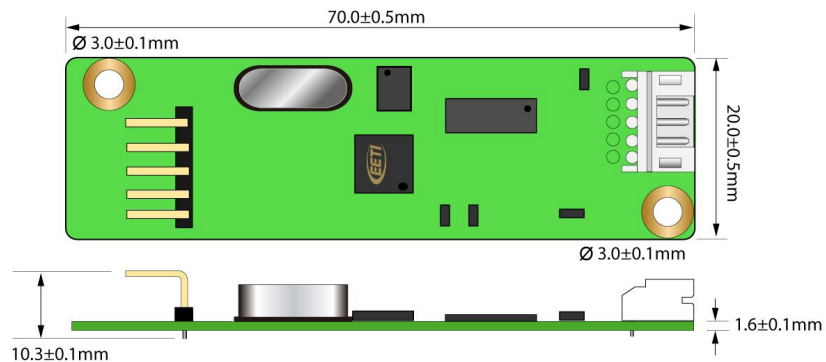

ETP-MB-R4502RPEG

Specifications:

RS232 Type Controller	
Circuit Board Dimension	20mm x 70mm (0.79inches x 2.75inches)
Power Requirements	D.C.+5V (100mA typical,50mV peak to peak maximum ripple and noise)
Operating Temperature	-25 to 80 °C
Storage Temperature	-55 to 150 °C
Relative Humidity	95% at 60 °C, RH Non-condensing
Interface	Bi-directional RS-232 serial communication
Protocol	No parity,8 data bits,1 stop bit,9600 baud(N,8,1,9600)
Resolution	2048×2048 resolution
Report rate	RS232 Model: Max. 180 points/sec
Response time	Max. 20 ms
Attached Cable	180cm shielded cable with 9-pin D-sub connector
Regulatory Approvals	FCC-B , CE, Unaffected by EMI from other nearly CRTs and other display devices CRTs
EMI	Unaffected by environmental EMI
Panel resistance	4 wire resistive model: 200 ~ 900 ohm 5 wire resistive model: 50 ~ 200 ohm

Product Package:



(1) ETP-MB-R4502RPEG (4 / 5 wire RS232 control board)

ETP-MB-R4502RPEG

Controller Panel Pin Assignment:



For 4-Wire Resistive Touch Panel

Pin-Out as below figure is automatically detected

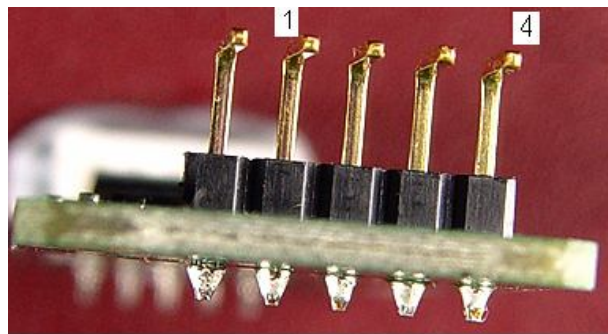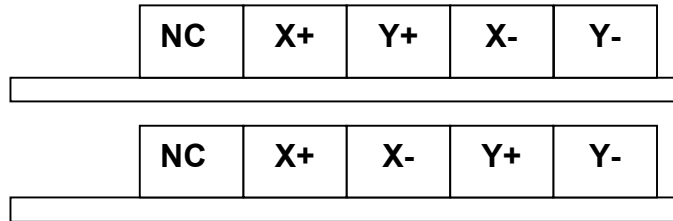

For 5-Wire Resistive Touch Panel

ELO or 3M type Pin-Out is automatically detected

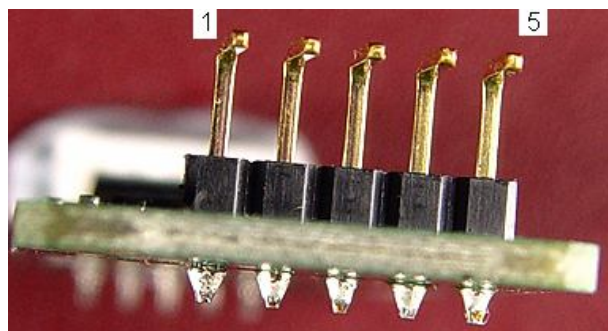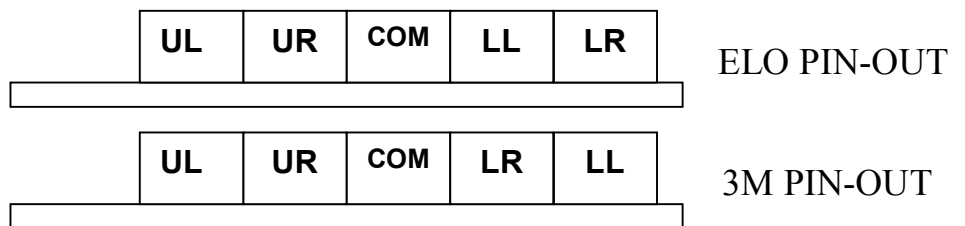

ETP-MB-R4502RPEG

Controller Wafer Pin Assignment:

